
ORDER FORM

The SB-AIR-1T configuration of the SUNBLADE AIR Shroud comprises of a single blade build. Introducing our latest lightweight innovation, crafted from a specialised extruded profile to offer a slim and sleek appearance without compromising on durability. This design ensures optimal wind resistance, blending aesthetic appeal with practical functionality. SUNBLADE shrouds adhere to Australian standards and provide consideration for building sustainability through solar shading.

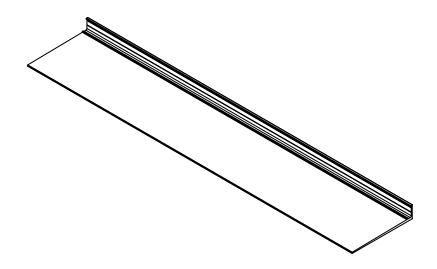

Category	Shroud	Supplied As	Flat Pack
Profile Name	SUNBLADE AIR SHROUD	Inclusions	Cover
Profile	Fixed 60mm (10mm-5mm Taper Nose)	Profile Depth	Fixed 300mm
Material	Aluminium 6063 T5	Material Weight	6.9 kg/m ²
Max Height	N/A	Density	2.70g/m ³
Max Width	6500mm*	Wind Rating	25m Above Ground
Fixing Flange	Fixed 50mm Flange	Certification	AS1530.3
Fixing Suitability	Steel, LGS, Timber, Concrete & Brick	Sides	1

It is the responsibility of the customer to ensure compliance with specific project requirements, wind ratings and that the structural integrity of the building and substrate structure is suitable for connection of the window shroud. The site engineer is responsible for reviewing and confirming all installation instructions, fixings and drawings. Engineering certificate is not included as standard.

Brand names, designs and content in this document are strictly copyright © 2024 McKinna Group ABN 51 088 110 169 McKinna Group are not liable for any errors, omissions, or inaccuracies in the information or for any decisions or actions taken in reliance on the information. We reserve the right to update, change, or correct any information at any time without notice.

^{*}Maximum Height and Widths may be limited by and/or determined by combinations that exceed engineering, material length and/or powder coat limitations.

SUNBLADE AIR SHROUD

SB-AIR-1T SINGLE BLADE CONFIGURATION

ORDER FORM	SECTION VIEW	
Quantity		
Inside Width A mm Min 100mm Max 6500mm Depth	X —	
B 300mm Fixed	X	
Flange C 50mm Fixed	A —	
Coating Brand Coating Range	DEPTH	
Coating Colour Guide available online visit mckinnagroup.com.au/coating-colours	300.00	
Standard Product Warranty 7 Years Workmanship & Materials Subject to conditions, further information can be found at mckinnagroup.com.au/warranty	FIXED PROFILE FLANGE 50mm TAPER NOSE 10mm-5mm CROSS SECTION X-X DETAIL Y	
Extended Coating Warranty No Ves Obtaining a specialty warranty from the coating brand is subject to location, usage, processing fees and approvals.		
CUSTOMER INFORMATION All orders are subject to	o our Terms and Conditions of Trade, for more details please visit mckinnagroup.com.au/orderterms	
Company Name	Full Name - Order Request	
Telephone	Email Address	
Project Name	Project Location	
Delivery Address		