
SUNBLADE ARC SHROUD

ORDER FORM

The SB-ARC-1T configuration of the SUNBLADE ARC Shroud comprises of a single blade build. Intentionally developed to support the broadest range of architectural projects. This series is tailor-made for architects who require a full array of customisation. SUNBLADE Shrouds adhere to Australian standards and provide consideration for building sustainability through solar shading.

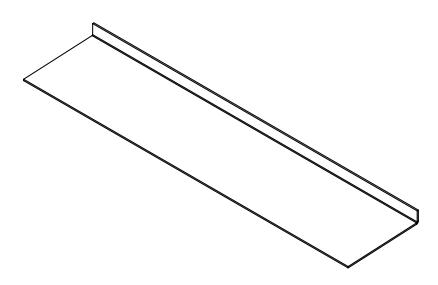

Category	Shroud	Supplied As	Flat Pack
Profile Name	SUNBLADE ARC SHROUD	Profile Depth	50mm - 650mm
Profile	6.0mm	Standard Profile Depth	300mm / 550mm
Material	Aluminium 5005 H34	Material Weight	16.26 kg/m ²
Max Height	N/A	Density	2.71g/m ³
Max Width	6000mm*	Wind Rating	13m Above Ground
Fixing Flange	50mm - 200mm	Certification	AS1530.1 + AS1530.3
Fixing Suitability	Steel, LGS, Timber, Concrete & Brick	Sides	1

It is the responsibility of the customer to ensure compliance with specific project requirements, wind ratings and that the structural integrity of the building and substrate structure is suitable for connection of the window shroud. The site engineer is responsible for reviewing and confirming all installation instructions, fixings and drawings. Engineering certificate is not included as standard.

*Maximum Height and Widths may be limited by and/or determined by combinations that exceed engineering, material length and/or powder coat limitations.

Brand names, designs and content in this document are strictly copyright © 2024 McKinna Group ABN 51 088 110 169 McKinna Group are not liable for any errors, omissions, or inaccuracies in the information or for any decisions or actions taken in reliance on the information. We reserve the right to update, change, or correct any information at any time without notice.

VISIT US ONLINE MCKINNAGROUP.COM.AU HEAD OFFICE 116 MALCOLM ROAD, BRAESIDE VICTORIA 3195 AUSTRALIA **CONNECT** sales@mckinnagroup.com.au 03 9580 4440



PAGE 1/2

SUNBLADE ARC SHROUD

ORDER FORM				SECTION VIEW					
Quantity									٦
Inside Wid	th								
A		mm							
Min 100mm Ma	ıx 6000mm								
Depth						-	ISM — A —		-
В		mm					Х —	∎	
Min 50mm Max	650mm					=		i	
Flange							Х 🚽		
С	50mm		100mm		mm				
If Depth exceed Flange minimur				Custom Range Max	< 200mm				
Coating Br	and		Соа	ating Range					
Coating Co	lour Guide	available	online visit <u>mc</u>	ckinnagroup.com.au/coat	ing-colours	-Y-		DEPTH	
								B 93°	ł
Standard P 7 Years	roduct W	arraı	Subject to	o conditions, further infor					C FLANGE
Workmanship &	& Materials		be found	d at mckinnagroup.com.a	u/warranty	CROSS	SECTION X-X	DETAIL Y	l
Extended C	_			y warranty from the coati	ng brand is				
No No	Yes	subjec	t to location, us	sage, processing fees and	approvals.				
CUSTOM	ER INFC	DRM	ATION	All or	ders are subject to	our Terms and Conditions of	f Trade, for more details pl	lease visit mckinnagroup.com.au/o	orderterms
Company N	lame					Full Name - O	rder Request		
Telephone			Email Address	5					
Project Name				Project Locati	ion				
Delivery Ac	dress								
-									

VISIT US ONLINE MCKINNAGROUP.COM.AU HEAD OFFICE 116 MALCOLM ROAD, BRAESIDE VICTORIA 3195 AUSTRALIA

CONNECT sales@mckinnagroup.com.au 03 9580 4440

